




Stella Doradus

Titan iRepeater

Brochure and User Guide for
iR6-T and iR4-T Repeaters

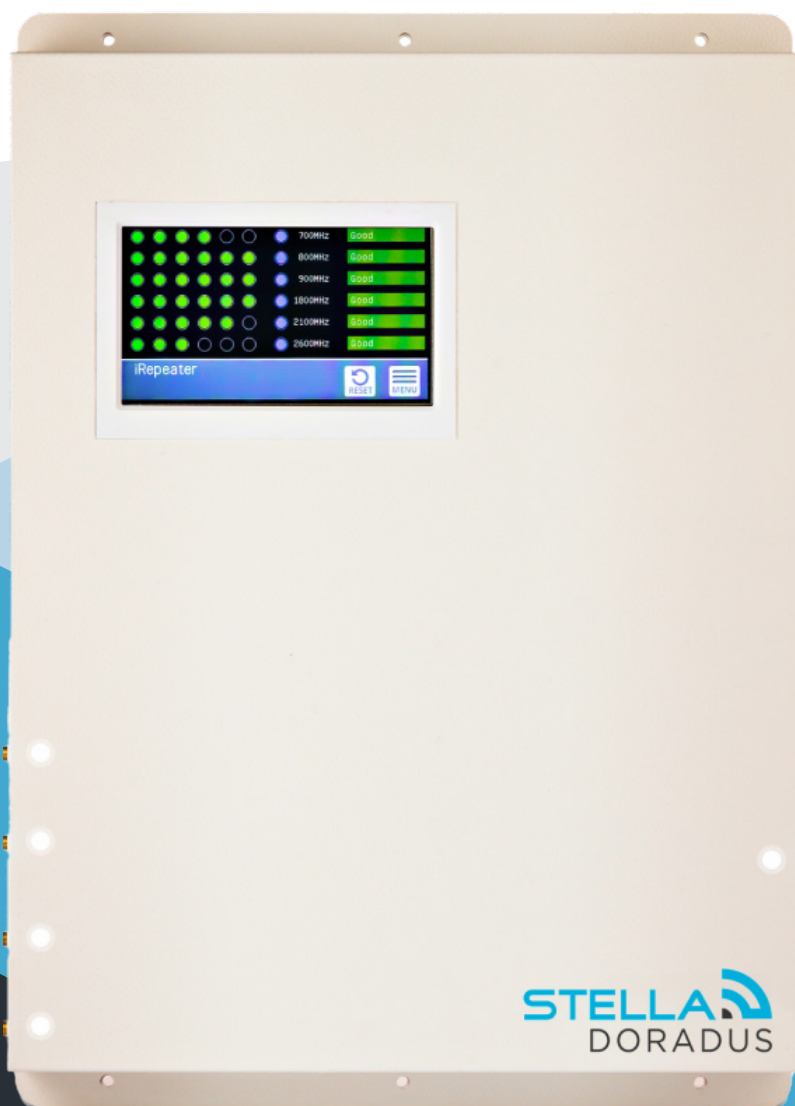

Stay
Connected.

Amplify
Your Signal.

TITAN – BROCHURE & USER GUIDE


Product Overview

Features & Specs	04
Titan Kit	06
Modular System	07
PortSense	08
Network Scanning	09


Other

Stella Control	10
FAQs	11

The Titan iRepeater

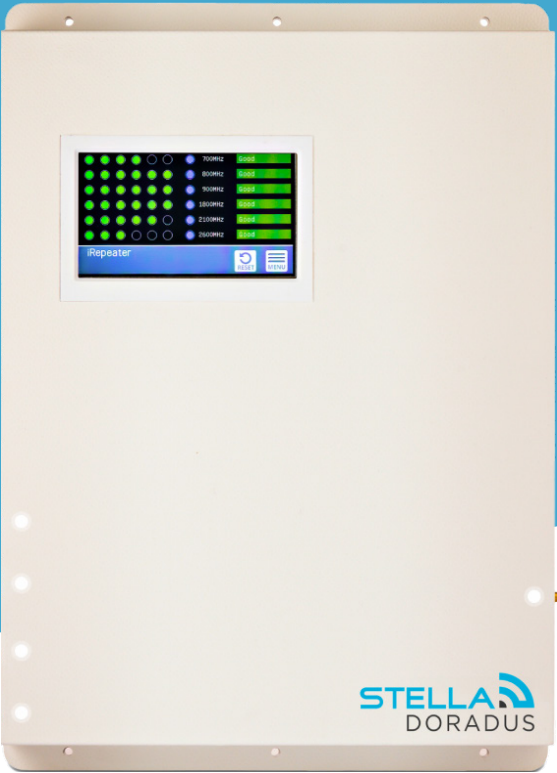


MODEL	WEIGHT	DIMS CM	SKU	BANDS
Titan iR6-T	4KG	41x29x4.8	iR6-T	28/20/8/3/1/7
Titan iR4-T	2.8KG	30x29x4.8	iR4-T	28/20/8/3



AMPLIFY ALL OPERATORS

Amplify the signal from all operators for 5G, 4G, 3G and 2G.



PORTSENSE

PortSense Technology confirms visually that cables and antennas are correctly connected.



REMOTE MONITORING

Monitor signal and repeater performance on StellaControl platform. Troubleshoot issues and adjust settings to ensure optimal coverage and reliability.

Specifications

EU Bands	B28	B20	B8	B3	B1	B7
Downlink	758-788	791-821	925-960	1805-1880	2110-2170	2620-2690
Uplink	703-733	832-862	880-915	1710-1785	1920-1980	2500-2570

Amplifier Specification


Coverage	up to 15 rooms with one Titan. (200+ rooms when LineAmps are deployed)
Gain	Uplink Gp: 65dB Downlink Gp> 65dB
Pass band ripple	<4dB
I/O impedance	50 ohm/SMA female connector
Max up/down signal strength	20dBm / 10dBm
Ambient Temperature	-30°C to +70°C
Power supply input	110 - 240V AC
Power supply output	12v DC
Oscillation Control	Automatic
AGC Level Control:	Automatic ¹
Uplink Switch On	Yes ²
AGC Range	0 to 30dB
Surge protection	SMA connectors DC grounded, 12V DC port MOV protected
Port Sense	Yes
Embedded modem	Yes

Antennas	Indoor Panel	Outdoor Yagi
Nominal Gain	6.4dBi / 9.4dBi	10dBi
3dB beam Pattern	60° x 60°	60° x 50°
Bandwidth	700MHz - 2700MHz	700MHz - 2700MHz
VSWR	<1.4	<1.5
Front to Back Ratio	> 20dB	> 20dB
Polarization	Vertical	Vertical
Power Rating	50W	50W
Impedance	50-OHM	50-OHM
Termination	N-Female	N-Female
Cross Pol. Discrimination	-20dB	-20dB
Dimensions	210 x 180 x 43mm	442 x 205 x 62mm
Weight	0.68kg	1.2kg
Wind velocity	126km/hr	140km/hr
Working temperature	-40°C to +65°C	-40°C to +65°C

How it Works

The Titan iRepeater is a commercial grade cellular amplifier that amplifies the signal for all mobile operators. When connected to the StellaControl platform, the Titan can be remotely managed, monitored, and adjusted, as well as receive real-time measurements of signal power, signal gain, and other control metrics for each band.


The 4 antenna ports allow the cellular signal to be amplified in 4 separate areas within the building. This increases the coverage area to between 5 and 15 rooms, depending on the size and shape of the room.

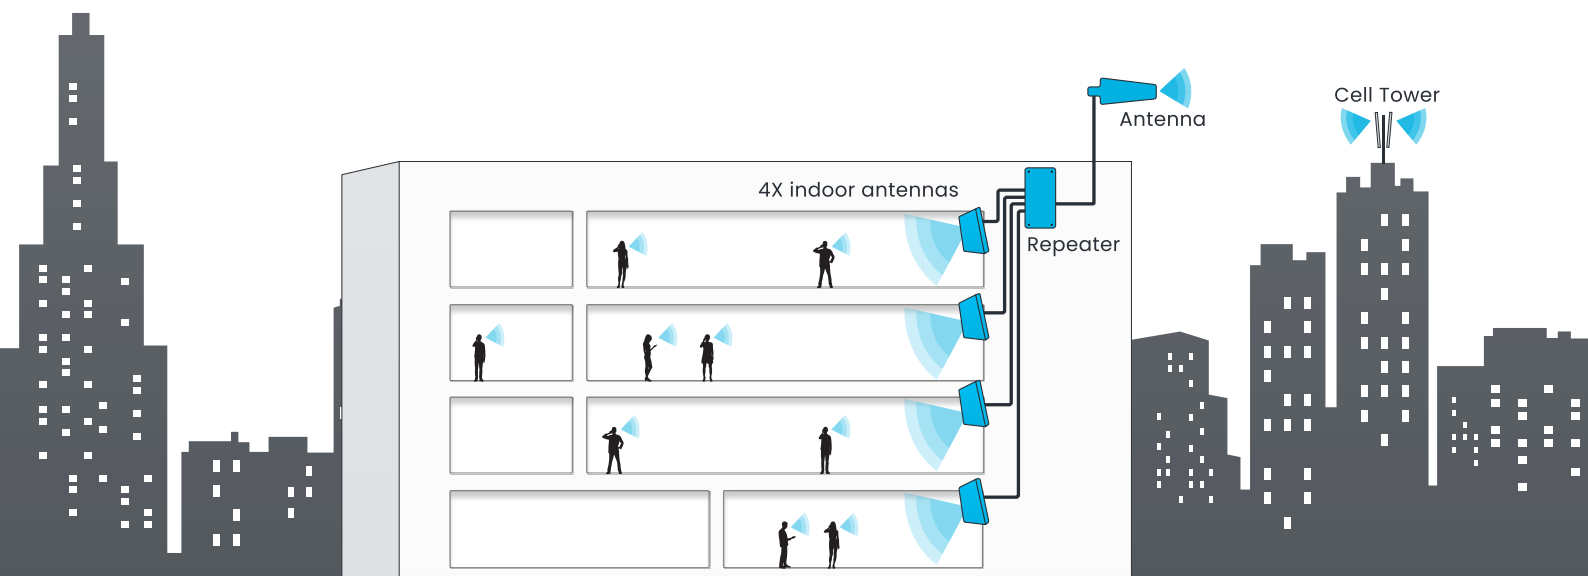

4X Internal antennas



Internal cables
4x15m SD240



Titan
iRepeater




External 15m
cable SD400



External
Antenna


Modular System

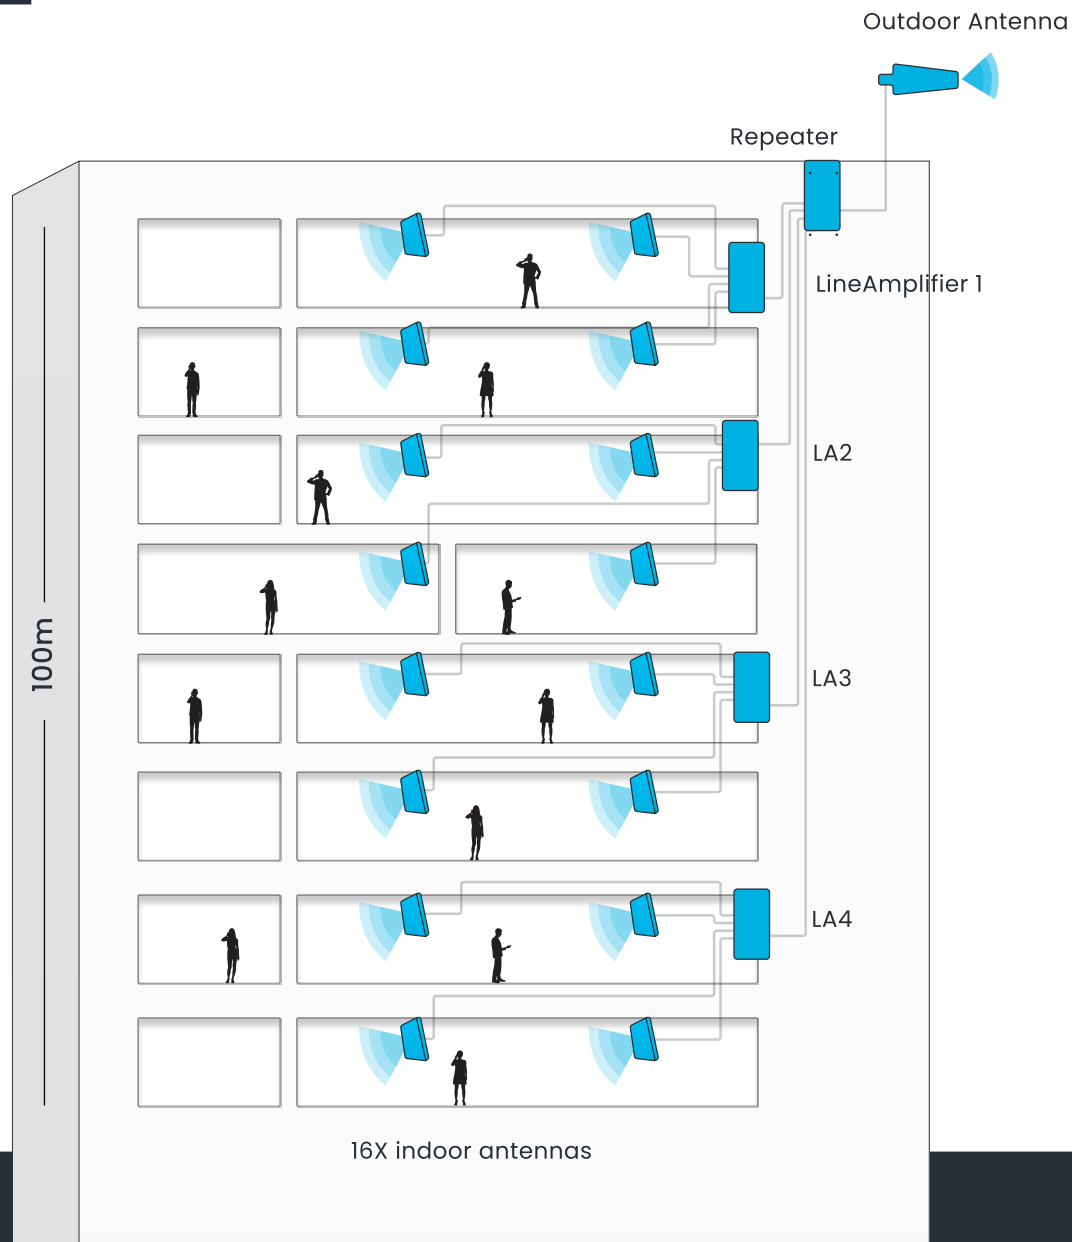

Plug and Play Buildings of Any Size

The Titan iRepeater is part of a modular system which, by adding Line Amplifiers, can provide coverage in large, multi-storey, multi-zoned buildings.

PortSense

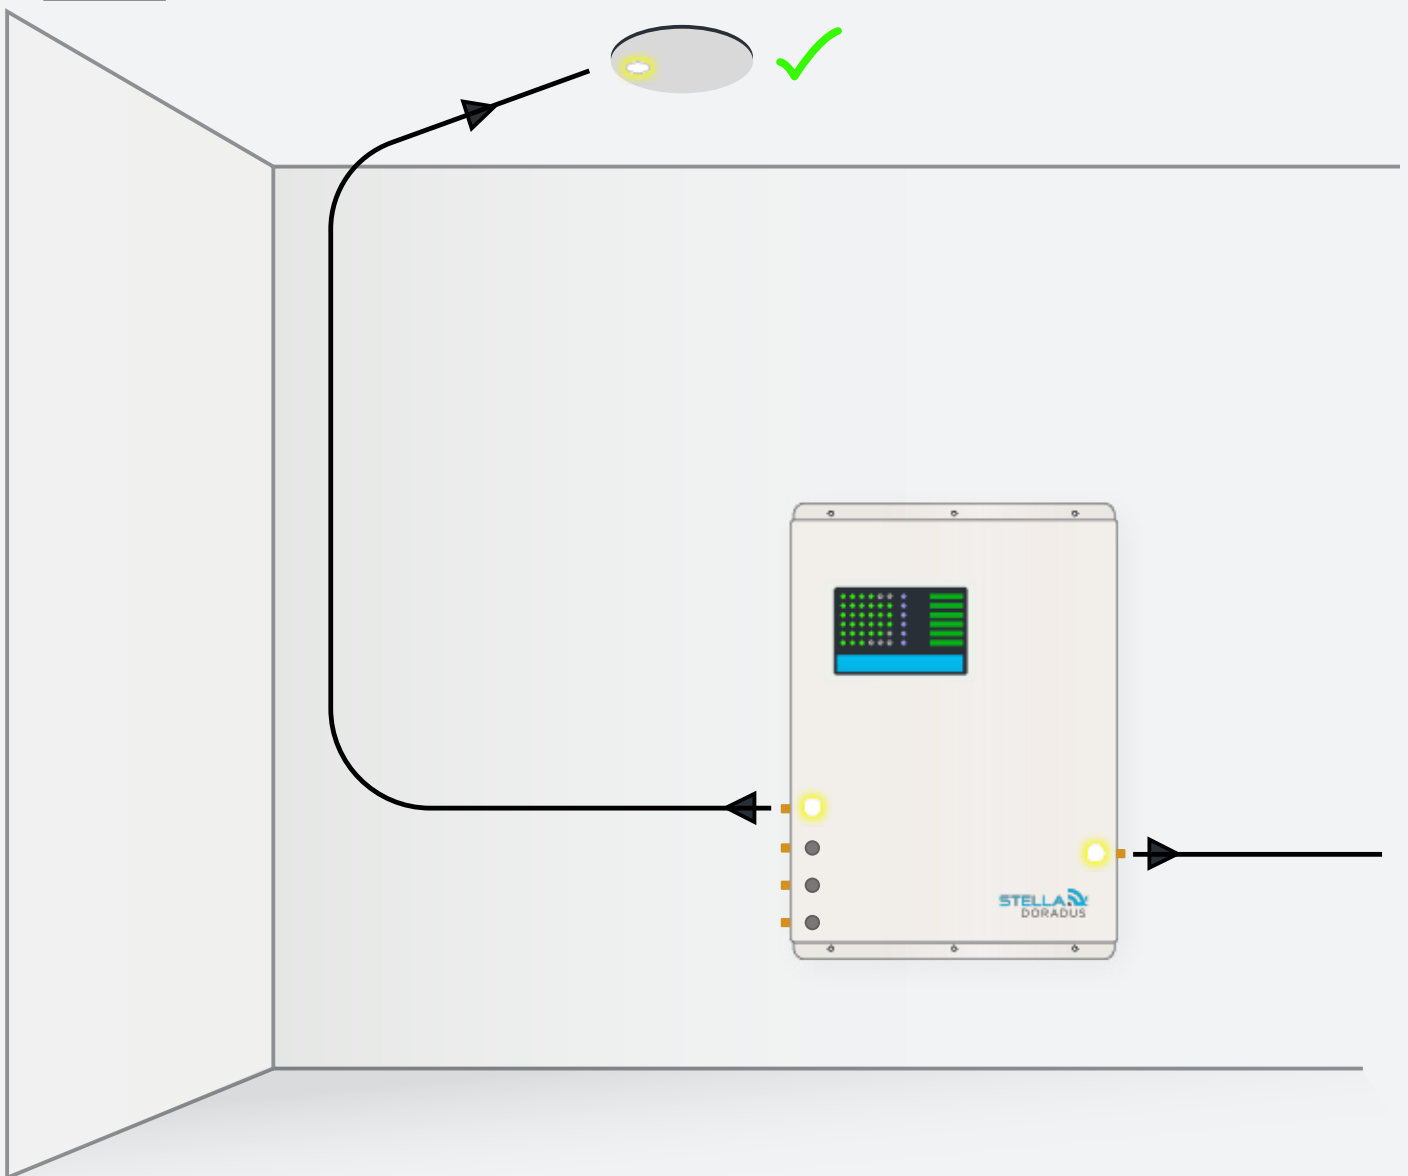

OUR PORT SENSE TECHNOLOGY (PATENT PENDING)

In order to test the cable connections between the repeater and the antennas, there are 5 LEDs on the repeater and corresponding LEDs on the indoor antennas.

These LEDs light up when the antennas are correctly connected to the repeater. This assures the installer that the antennas are outputting signal and there are no faults in the cables. They can also be used to show which antenna is connected to which port on the repeater.

Cell Scanning

EMBEDDED CELLULAR MODEM

The Titan iRepeater has an internal embedded cellular modem that automatically connects to StellaControl (our online monitoring platform), without the need to connect an ethernet cable. This means the repeater is always accessible remotely for monitoring.




CELL SCANNING

The mobile signal of all operators can be scanned outside the building. A time chart of cellular coverage outside can be built up for the building. This is very useful for troubleshooting and monitoring the ever-changing RF environment.


Operator	Service	Band	Cell ID	Power	Quality	RSSI	PCI
02 DE	LTE	B7	5461519	-106	-6	-84	151
	LTE	B3	5732137	-89	-14	-55	437
	LTE	B8	5732127	-78	-8	-55	58
	LTE	B20	5732117	-65	-20	-29	163
Telekom	LTE	B7	33016582	-87	-6	-62	408
	LTE	B1	26902798	-90	-20	-52	446
	LTE	B3	33016576	-78	-7	-38	279
	LTE	B3	26902789	-86	-11	-58	445
	LTE	B8	33016585	-62	-7	-38	305
	LTE	B20	28483077	-75	-20	-38	208
Vodafone DE	LTE	B7	3504646	-107	-6	-81	147
	LTE	B1	3504660	-96	-18	-60	85
	LTE	B1	2580245	-102	-20	-62	436
	LTE	B3	2827016	-100	-20	-60	69
	LTE	B3	3504649	-95	-8	-61	144

Stella Planner

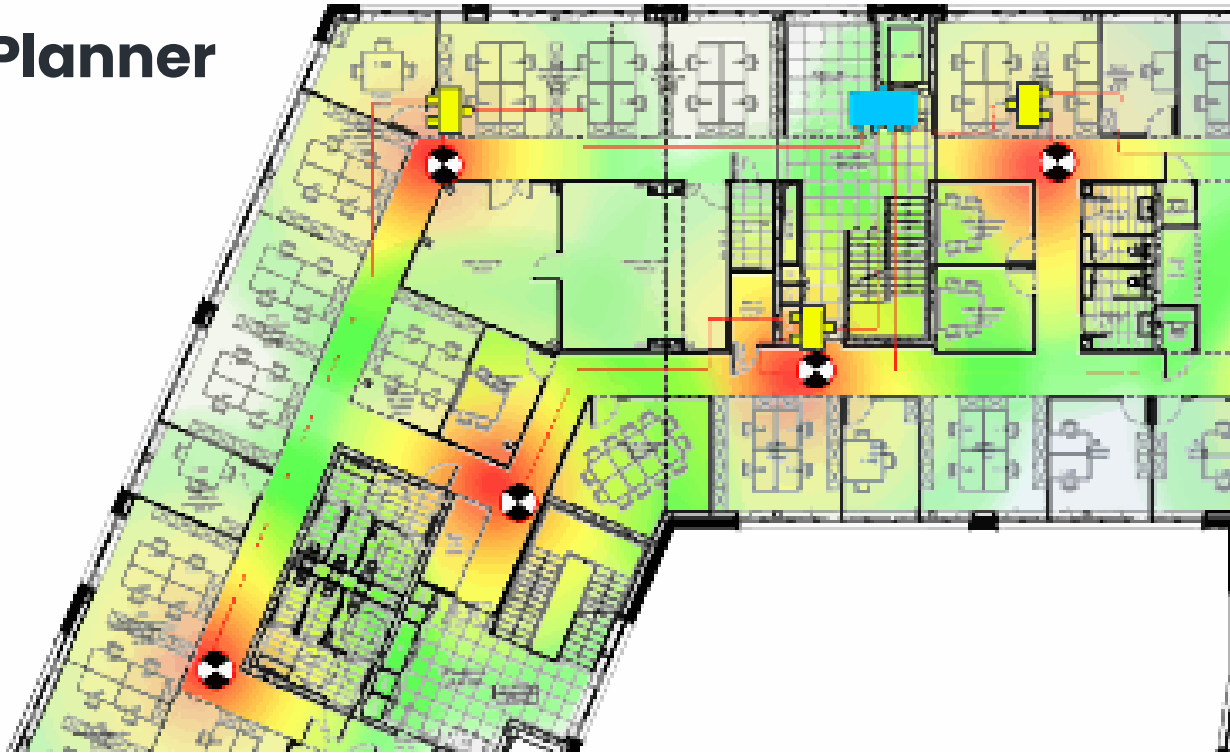

STELLA PLANNER

Repeater systems can be designed with the StellaPlanner. Building plans can be uploaded and antennas placed in the desired locations. The tool calculates signal power and RF losses in the design. All projects can be stored in a personalized account on StellaControl. Stella helps you to design the optimal repeater system.

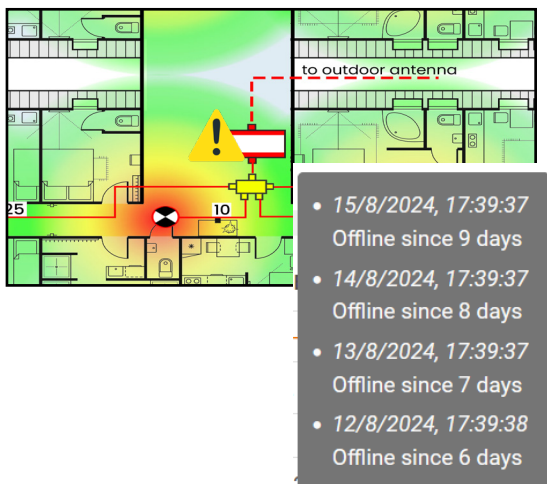

ALERTS

Email alerts are automatically sent to the installer if there are any changes to the system, eg. an amplifier is disconnected, or the operator installs a new base station antenna in the vicinity. This forewarns the installer/Stella of potential issues and to take corrective action.



Stella Doradus

Coolfinn, Portlaw, Waterford, Ireland

P. +353 51 387145 info@stelladoradus.com
www.stelladoradus.com